



READYFLEX™ HOT HOLDING CABINET Specifications

F.O.B. Sedalia, Missouri 65301



**Model RFHU-23-4 4" Deep
Multipan Configuration Shown**

OPTIONS:

- Front and Back 4.3" Touchscreen
- Front 4.3" Touchscreen w/ Front Timer Bars
- Front 4.3" Touchscreen w/ Front and Back Timer Bars
- Dedicated Lid Options for High Volume Proteins

Electrical


- 120V - 60Hz
- 208/240V - 60Hz
- 220/240V - 50/60Hz

Agency Listings:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

SS-1202 ReadyFlex™ Holding Unit 4 inch deep



Specification subject to change

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

ReadyFlex™ Holding Unit - 4.0" Deep

- RFHU-22-4 2X2 Configuration
- RFHU-23-4 2X3 Configuration
- RFHU-24-4 2X4 Configuration
- RFHU-32-4 3X2 Configuration
- RFHU-34-4 3X4 Configuration
- RFHU-41-4 4X1 Configuration
- RFHU-42-4 4X2 Configuration

BODY:

- Stainless Steel Exterior construction for durability and ease of cleaning.
- Robust stainless steel pan cover.
- Multipan configuration flexibility for 1/3, 1/2 and Full Size Pans*

* Full Size Pans limited to 3 wide or larger units.

HEATER CONFIGURATIONS:

- Independent Top and Bottom Zoned Heat for maximum recipe flexibility.
- Easy configured for shelf heat, if desired.
- Quick heat up approximately 20 minutes.

CONTROLS:

- Full Color 4.3" Touchscreen Control
 - Easy to Use, Easy to Learn
 - Timer Bar functionality without timer bars.
- Start and Stop Timers
- Displays product being held, countdown timer, cook more alerts, and FIFO for each pan.
- Simplified, Intuitive Local Programming, Recipe Storage, & Menu Switch
- Multipan configuration
- Network Support

Built In Connectivity

- Wi-Fi (Dual Band 802.11 A/B/G/N 2.4Ghz/5Ghz)
- Ethernet (10/100Mbps)

USB Support

- Firmware Update
- Recipe Import/Export

Duke Connected Equipment Platform (DCEP) Support


- Asset Management
- Firmware Update
- Recipe Management
- Diagnostics

ReadyFlex™ Holding Unit - 4.0 Inch Deep

Catalog No. Food Warmer

A.I.A. File No. 35-C-13

ReadyFlex™ Holding Unit - 4.0" Deep

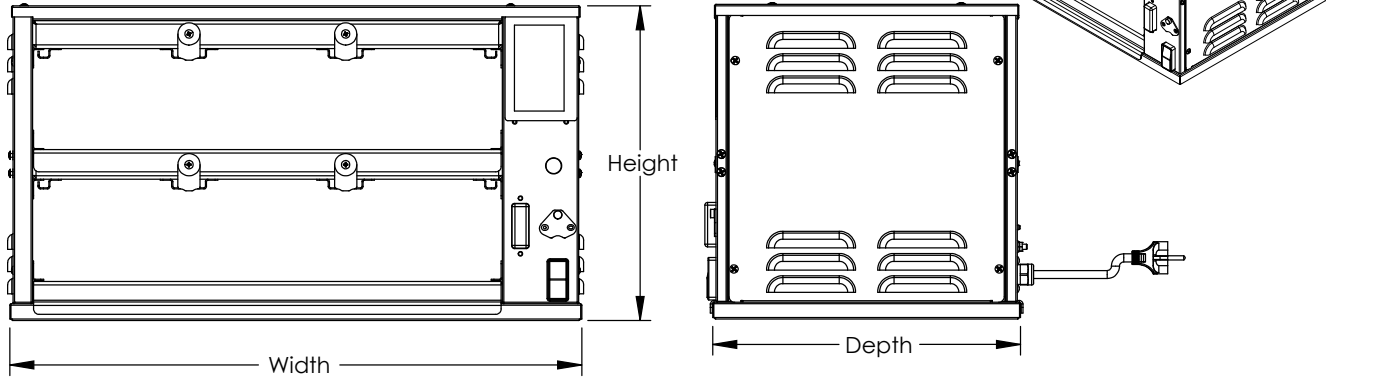

ELECTRICAL SPECIFICATION/CORD RATING (TOP AND BOTTOM HEAT)

Model	120V - 60Hz		208/240 V - 60Hz		220/240V - 50/60Hz	
	Amps	NEMA	Amps	NEMA	Amps	Schuko
RFHU-22-4	10	5-15P	5.8/6.7	6-15P	6.7	CEE7 VII
RFHU-23-4	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-24-4	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-32-4	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-34-4	N/A	N/A	13/15	6-20P	15	CEE7 VII
RFHU-41-4	10	5-15P	5.8/6.7	6-15P	6.7	CEE7 VII
RFHU-42-4	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII

DIMENSIONS:

Freight Class: 100

Model	4.0" Deep Pan Config						Cubic Ft. Crated	Weight	
	Height		Width		Depth (body only)			lbs.	kgs
	in.	cm	in.	cm	in.	cm			
RFHU-22-4	14.5	36.8	19.0	48.3	14.1	35.7	7.5	90	40.8
RFHU-23-4	14.5	36.8	26.0	66.0	14.1	35.7	9.8	105	47.6
RFHU-24-4	14.5	36.8	33.0	83.8	14.1	35.7	12.1	125	56.7
RFHU-32-4	20.6	52.3	19.0	48.3	14.1	35.7	9.5	105	47.6
RFHU-34-4	20.6	52.3	33.0	83.8	14.1	35.7	15.2	170	77.1
RFHU-41-4	26.8	68.1	11.8	30.0	14.1	35.7	8.1	95	43.1
RFHU-42-4	26.8	68.1	19.0	48.3	14.1	35.7	11.5	130	59.0

This product may be covered by one or more patents or pending patent applications. For more details, see www.dukemfg.com/patents



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com