



READYFLEX™
HOT HOLDING CABINET

Specifications

F.O.B. Sedalia, Missouri 65301

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

ReadyFlex™ Holding Unit - Full Size Pans 2.5" Deep, 4" Deep and Hybrid

- RFHU-21F 2X1 Configuration
- RFHU-31F 3X1 Configuration
- RFHU-41F 4X1 Configuration
- RFHU-51F 5X1 Configuration
- RFHU-22F 2X2 Configuration
- RFHU-23F 2X3 Configuration
- RFHU-52F 5X2 Configuration

BODY:

- Stainless Steel Exterior construction for durability and ease of cleaning.
- Robust stainless steel pan cover.
- Multipan configuration flexibility for 1/2 size long pan, full size pans and 1/2 size sheet pans.

HEATER CONFIGURATIONS:

- Independent Top and Bottom Zoned Heat for maximum recipe flexibility.
- Easy configured for shelf heat, if desired.
- Quick heat up approximately 20 minutes.

CONTROLS:

- Full Color 4.3" Touchscreen Control
 - Easy to Use, Easy to Learn
 - Timer Bar functionality without timer bars.
- Start and Stop Timers
- Displays product being held, countdown timer, cook more alerts, and FIFO for each pan.
- Simplified, Intuitive Local Programming, Recipe Storage, & Menu Switch
- Multipan configuration
- Network Support

Built In Connectivity

- Wi-Fi (Dual Band 802.11 A/B/G/N 2.4Ghz/5Ghz)
- Ethernet (10/100Mbps)

USB Support

- Firmware Update
- Recipe Import/Export

Sous Chef Cloud™

- Asset Management
- Firmware Update
- Recipe Management
- Diagnostics



Model – RFHU-41F

OPTIONS:

- Front and Back 4.3" Touchscreen

Electrical

- 120V - 60Hz
- 208/240V - 60Hz
- 220/240V - 50/60Hz

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102


800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1270 ReadyFlex Holding Unit Full Size Pan

Specification subject to change



REV B 09/05/2023

ReadyFlex™ Holding Unit - 2.5" Deep, 4" Deep and Hybrid




Catalog No. Food Warmer

A.I.A. File No. 35-C-13

RFHU SPECIFICATIONS

A.I.A. File No. 35-C-13

Catalog No. Food Warmer

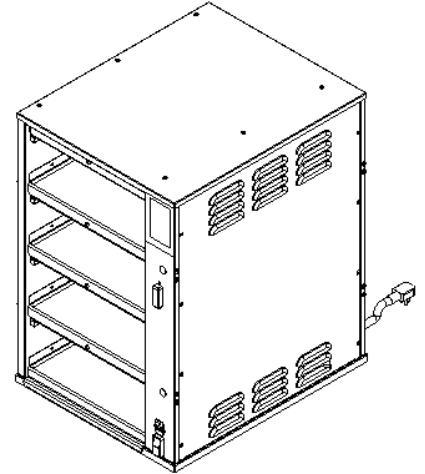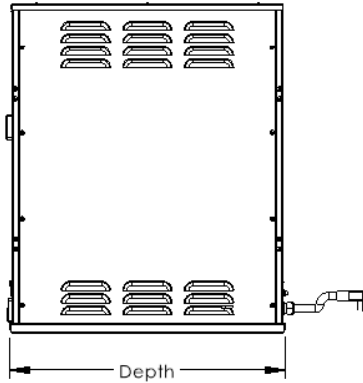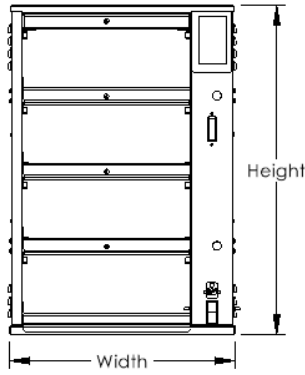

RFHU-41F Shown Above

ELECTRICAL SPECIFICATION/CORD RATING (TOP AND BOTTOM HEAT)

Model	120V - 60Hz		208/240 V - 60Hz		220/240V - 50/60Hz	
	Amps	NEMA	Amps	NEMA	Amps	Schuko
RFHU-21F	7.5	5-15P	6.5/7.5	6-15P	7.2	CEE7/7 (16A)
RFHU-31F	11	5-15P	10.8/12.5	6-20P	12	CEE7/7 (16A)
RFHU-41F	11	5-15P	13/15	6-20P	14.3	CEE7/7 (16A)
RFHU-51F	N/A	N/A	13/15	6-20P	14.3	CEE7/7 (16A)
RFHU-22F	11	5-15P	13/15	6-20P	14.3	CEE7/7 (16A)
RFHU-23F	N/A	N/A	13/15	6-20P	14.3	CEE7/7 (16A)
RFHU-52F	N/A	N/A	21.6/25	6-30P	23.9	CEE7/7 (32A)

DIMENSIONS

Freight Class: 100

Model	Width		Depth		Height						Shipping Weight		
					2.5" Deep Pan		4" Deep Pan		Hybrid Pan*				
	in.	cm	in.	cm	in.	cm.	in.	cm	in.	cm	Cu.Ft	lbs	kgs
RFHU-21F	18.5	47.0	22.5	57.2	11.9	30.2	14.5	36.8	13.2	33.5	10.0	90	40.8
RFHU-31F	18.5	47.0	22.5	57.2	16.7	42.4	20.7	52.6	18	45.7	12.6	105	47.6
RFHU-41F	18.5	47.0	22.5	57.2	21.4	54.4	26.7	67.8	24.1	61.2	15.1	125	56.7
RFHU-51F	18.5	47.0	22.5	57.2	26.2	66.5	32.8	83.3	28.8	73.2	17.6	140	63.5
RFHU-22F	32.2	81.8	22.5	57.2	11.9	30.2	14.5	36.8	13.2	33.5	16.0	160	72.6
RFHU-23F	45.9	116.6	22.5	57.2	11.9	30.2	14.5	36.8	13.2	33.5	22.0	220	99.8
RFHU-52F	32.2	81.8	22.5	57.2	26.2	66.5	32.8	83.3	28.8	73.2	28.1	200	90.7

* Configurations with;
Even # of rows = 1/2 2.5" & 1/2 4"
Odd # of rows = 1 less 4"

ReadyFlex™ Holding Unit - 2.5" Deep, 4" Deep and Hybrid



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.
© 2023, Duke Manufacturing Co.

Your Solutions Partner